

7" LIGHT-DUTY DIGITAL MONITOR

CM-708V


- High voltage (From DC 12V to DC 48V)
- 8bit MICRO controller
- High Resolution & Low reflection LCD
- All functions are displayed on screen (OSD function)
- Language Display Selection (JPN-ENG-KOR-FRA-SPA-ITA-GER-SWE)



SPECIFICATION


SCREEN SIZE	7 Inch	VIDEO SIGNAL	Composite Video 75Ω 1Vp-p
RESOLUTION	800(W) x 3(RGB) x 480(H)	AUDIO SIGNAL	MONO
BRIGHTNESS	400 cd/m ²	BUTTON	Power / Mode / Menu / Up / Down
CONTRAST RATIO	500 : 1	OPERATING TEMPERATURE	-30°C ~ 70°C
VIEW ANGLE (L/R/U/D)	70/ 70/ 50/ 70	DIMENSION (W x H x D)	201 x 117 x 30.7 mm (Monitor Only)
POWER SUPPLY	DC 12V ~ 48V (Max.50V)	WEIGHT	450g (Monitor Only)
INPUT SYSTEM	AUTO (NTSC/PAL)		

FUNCTION OF EACH PART

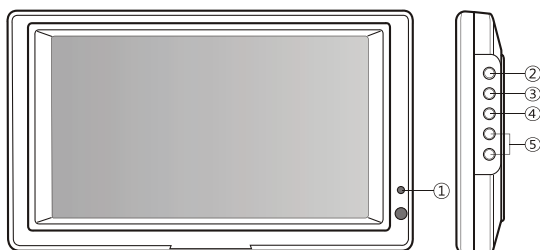

- | | |
|-------------|----------------------------------|
| 1. S/BY LED | Power or Stand-by status display |
| 2. POWER | Power ON/OFF button |
| 3. MODE | Distance line selection button |
| 4. MENU | SETUP/PICTURE selection function |
| 5. UP/DOWN | MENU level control |

CONNECTION

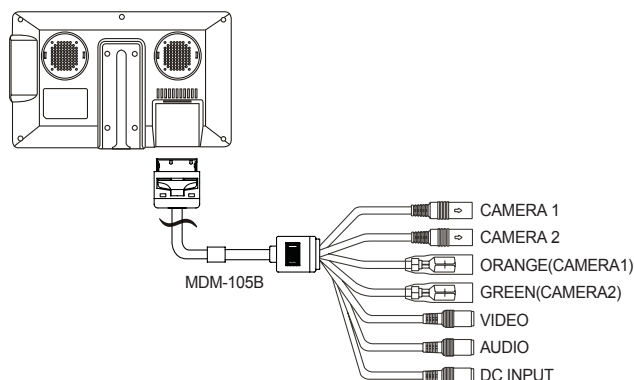

STAND
Ceiling Installation



CL-9
(Option)